


Features

- Vibrantly and consistent printing quality **Black Back**
- Strong durable base fabric
- Great cost-effective
- Matte & Glossy surface available
- Best suited for indoor/outdoor front-lit displays

Applications

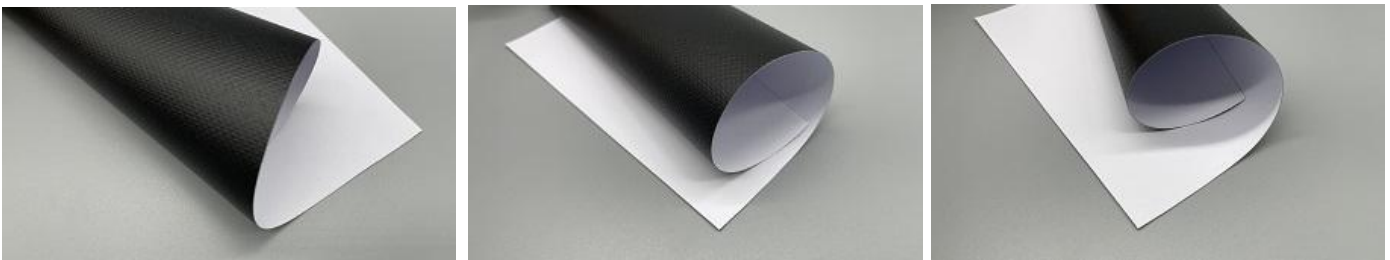

Technical Data Sheet

Item Code	FBCBFX10101818440B	Test Method
Base Fabric	1000D*1000D 18*18	DIN EN ISO2060
Weight (GSM)	440	DIN EN ISO2286-2
Tensile Strength	Warp (N/5cm)	1800
	Weft (N/5cm)	1800
Tear Strength	Warp (N/5cm)	280
	Weft (N/5cm)	250
Adhesion Strength	N/A	DIN53357:1982
Temperature	-30°C/+70°C	ISO13934-1:1999
RF Weldable (Heat Sealable)	YES	DIN53354
Flame Retardant	B1/M1/M2/NFPA701	

Information contained in this document is based on our general experience and is given in good faith. But we are unable to accept responsibility in respect to factors which are outside our knowledge or control.

Ink Printability

SOLVENT	ECO-SOLVENT	UV	LATEX	SCREEN PRINTING
■	■	■	■	■

	Add: Room 912, No.3 Building, Shangdong Business Center, Haizhou District, Haining, Zhejiang, China Tel: +86-573-80776996 Fax: +86-573-80776998 Mob/Skype/Wechat/WhatsApp: +86-15858322153 mailto:contact@hncomax.com https://www.hncomax.com	
---	--	---